

The state of the s

Takahiro KOISHI "Transmission Data Loss Detection System" Q68781----Filed March 1, 2002

2/7

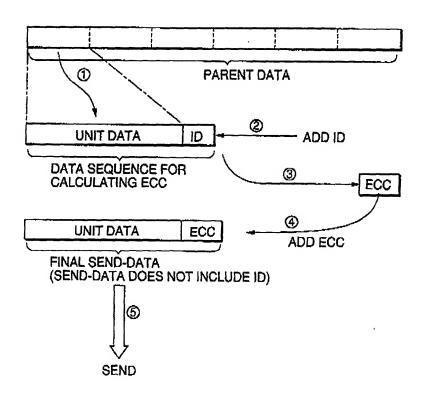


FIG.2

Takahiro KOISHI "Transmission Data Loss Detection System" Q68781----Filed March 1, 2002

3/7


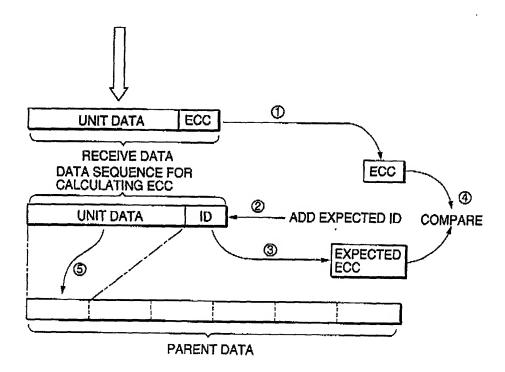


FIG.3

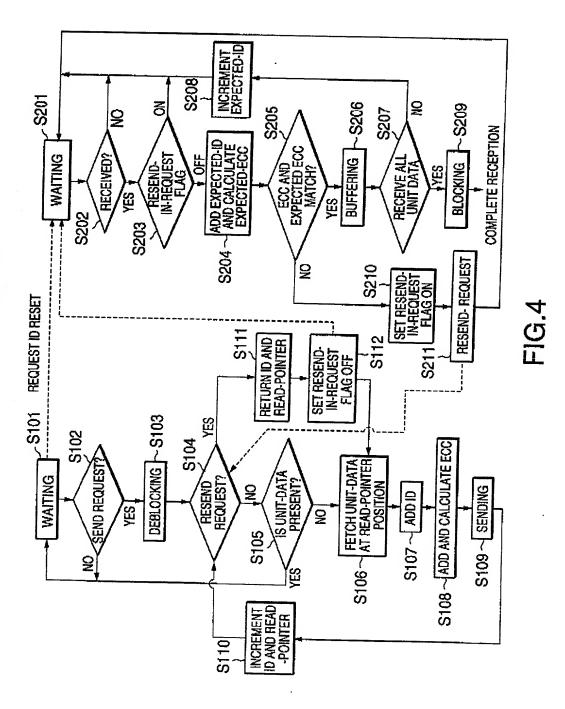


THE REPORT HAVE BEEN BEEN BEEN WITH THE REPORT OF THE PROPERTY OF THE PROPERTY

5/7

EXAMPLE 1) A CASE WHERE SENDING/RECEIVING IS COMPLETED NORMALLY (AN ERROR DOES NOT OCCUR)

PARENT DATA

IN THIS EXAMPLE, PARENT DATA IS DEBLOCKING TO UNIT DATA, A TO E.



CALCULATE ECC AND ADD THE ECC TO THE UNIT DATA


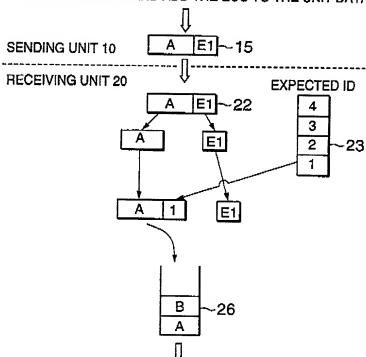


FIG.5

6/7

EXAMPLE 2) A CASE WHERE A BIT ERROR OR LOSS OF SEND DATA OCCURRED DURING TRANSMISSION

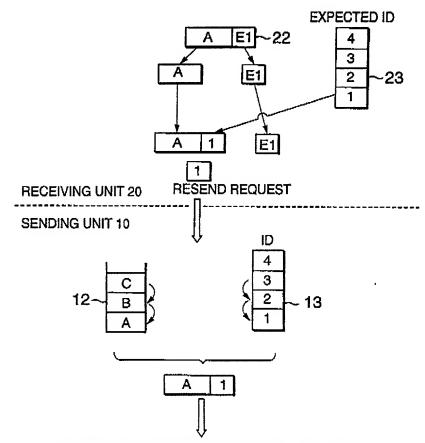

SUBSEQUENT STEPS ARE THE SAME AS BEFORE

FIG.6

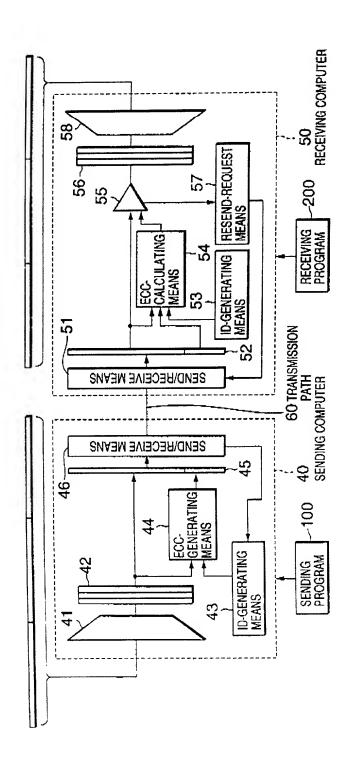


FIG.

THE REPORT OF THE PARTY OF THE